

SWECO'S NEW FLO-THRU SEPARATOR: A BREAKTHROUGH IN THROUGHPUT.

HIGH FLOW-RATE VIBRATORY SEPARATOR PROVIDES THROUGHPUT TO 240 TPH FOR SCREENING/SCALPING OF DRY MATERIALS AND 1400 GPM FOR WET APPLICATIONS.

EXTREMELY ENERGY EFFICIENT.



SCREEN SIZES AND VIBRATORY ACTION EASILY ADJUSTABLE FOR OPTIMUM SCREENING.

RUGGED SWECO-BUILT MOTOR WITH DOUBLE-ROLL SPHERICAL ROLLER BEARINGS.

SCREENED MATERIAL DROPS THROUGH SEPARATOR TO TANK OR HOPPER.

HIGH CAPACITY EASILY HANDLES MATERIAL SURGES. OVERSIZED IMPURITIES AND TRAMP MATERIALS DISCHARGED HERE.

HEAVY-DUTY, 10-GAUGE CONSTRUCTION. LOW PROFILE MEETS LOW HEADROOM REQUIREMENT.

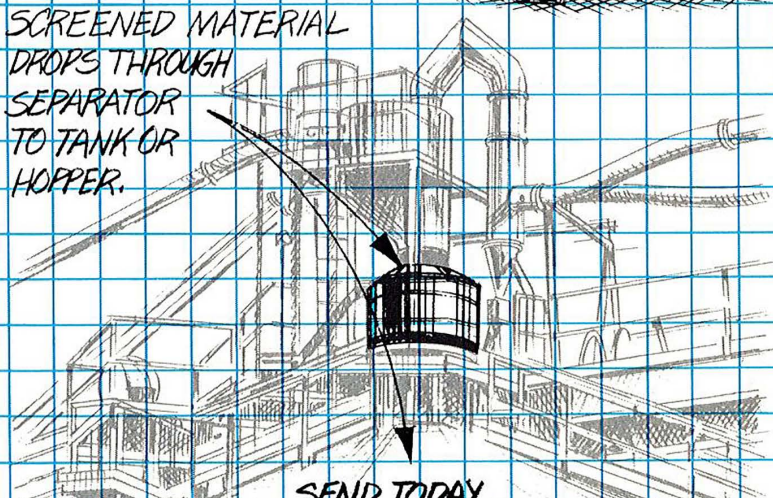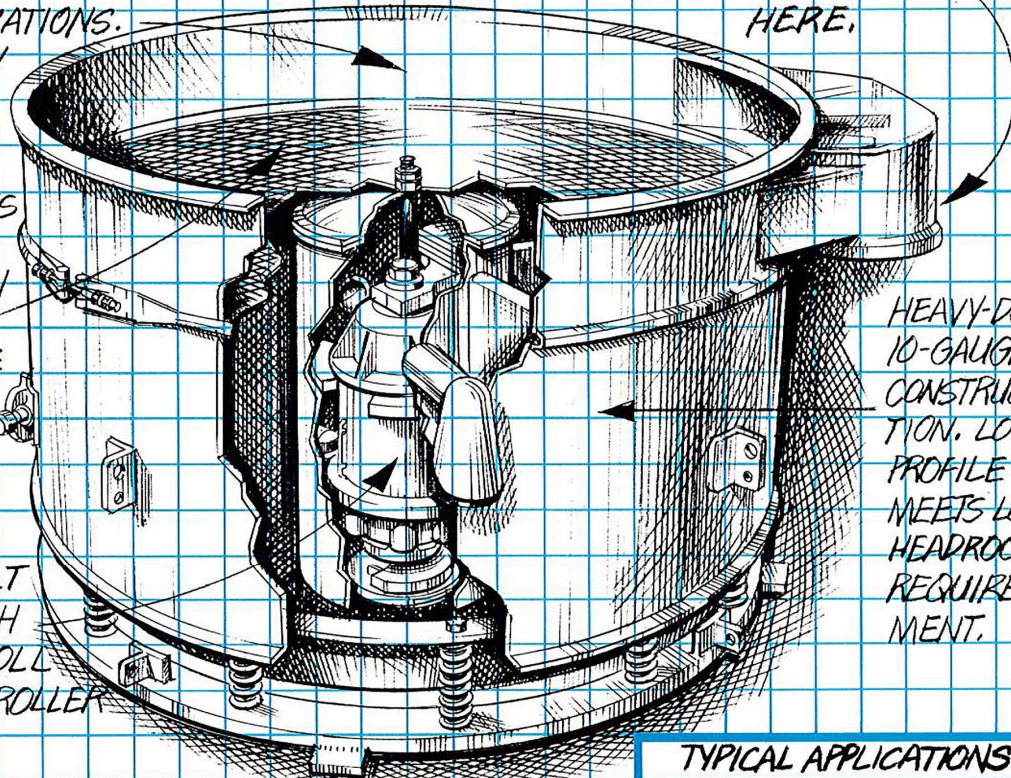

TYPICAL APPLICATIONS

| | |
|---------------------------|--------------------------------------|
| ALUMINA POWDER- | 240 TPH ON 1/8" CLEAR OPENING SCREEN |
| PLASTIC PELLETS- | 60,000 LBS. PER HOUR ON 3 MESH |
| CORN- | 170 TPH ON 3/4" CLEAR OPENING SCREEN |
| SODA ASH- | 80 TPH ON 4 MESH |
| POULTRY EFFLUENT CLEANUP- | 1400 GPM ON 20 MESH |
| SALT- | 100 TPH ON 4 MESH |

SEND TODAY FOR FREE LITERATURE.

35 YEARS OF ENGINEERING SEPARATES US FROM THE REST.

© 1982 SWECO, INC.

(800) 80-SWECO www.sweco.com info@sweco.com

