


## **ES-SERIES**STATIONARY "ECONO-VEYOR"

For use in conveying packages, boxes, crates, and bags. Up to 1500# capacity total load rating



## **DESIGN FEATURES:**

- Mild steel construction with green industrial paint. Manufactured in lengths to meet your requirements
- 8", 12", 16", or 24" wide black 120# PVC belt. Standard belt speed is 65 fpm
- Hydrocrowned pulleys
- 1ph or 3 ph TEFC motor with gear reducer drive (shielded)
- Adjustable floor stands (30" to 40" belt height)
- Available options include side rails, assembly table leaves, variable speed drive, rough top belt, center drive, and gravity hookups

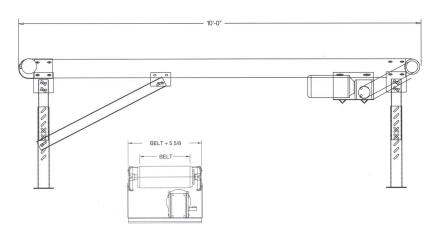

## **STANDARD SPECIFICATIONS:**

- FRAMES: All steel 14 ga. slider bed construction with cross braces for added strength. Finished with two coats green industrial paint
- DRIVE: Equipped with C-flange gear reducer drive with final chain drive to drive pulley. Bolt on C-flange motors, 65 fpm standard belt speed
- BELT: Standard belt is 120# black PVC with cover one side. Roughtop belt available if specified. See price list
- BEARINGS: Sealed ball bearings throughout conveyor

 GUARDS: Furnished at all necessary points for operator safety © 2001 Chantland-PVS Company, Humboldt, IA

- CAPACITY: See price list for various size drives. 150# unit load
- WEIGHTS:

<b>Belt width</b>	10' long	add'I per ft
8"	250#	14#
12"	280#	16#
16"	305#	18#
24"	360#	21#