


Gravity Dual Control Gate

Series "G"


For Gravity Flow Applications

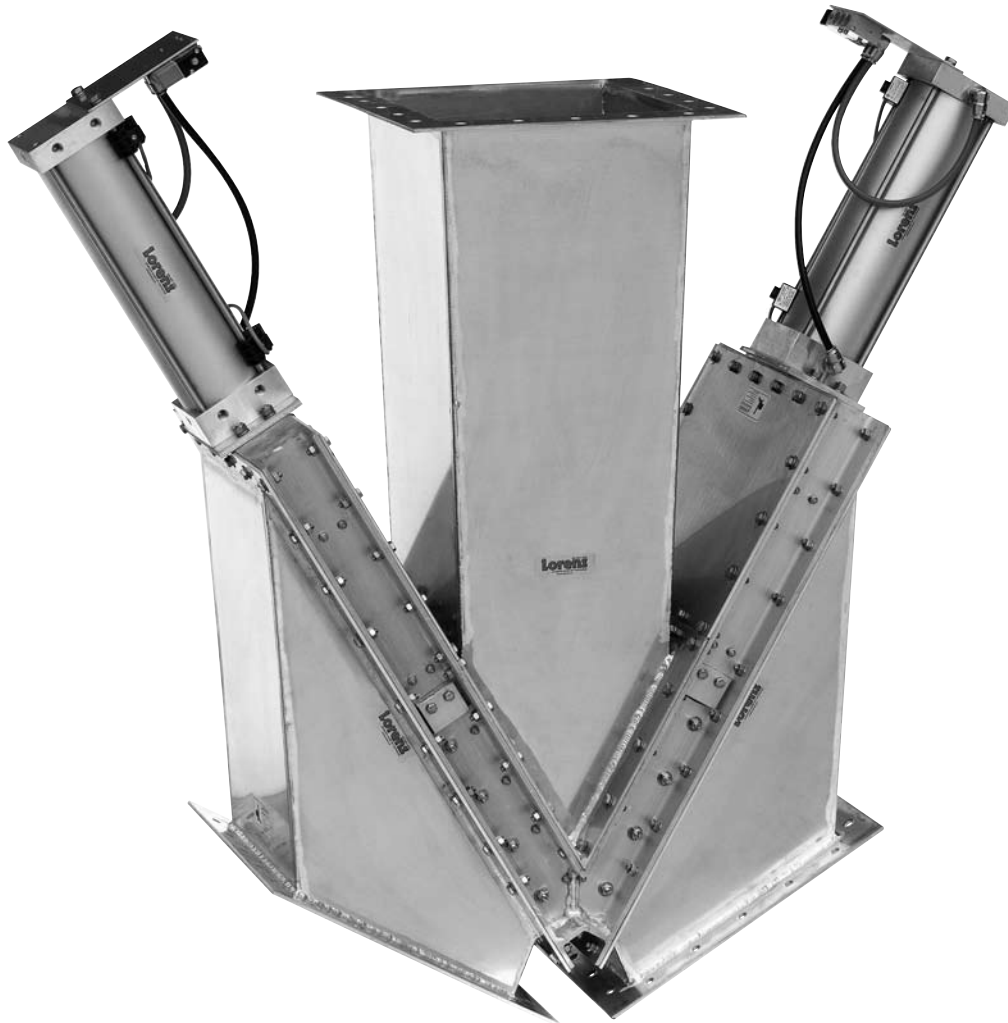

Standard Features

- Stainless steel material contact points
- Dust tight seals
- Lightweight aluminum frame, corrosion resistant
- Choice of stainless, aluminum and carbon inlets and outlets
 - 60° configuration standard -45° optional
- No internal ledges for product to collect
- Rated for 82°C (180°F)

Gravity Dual Control Gate For Gravity Flow Applications

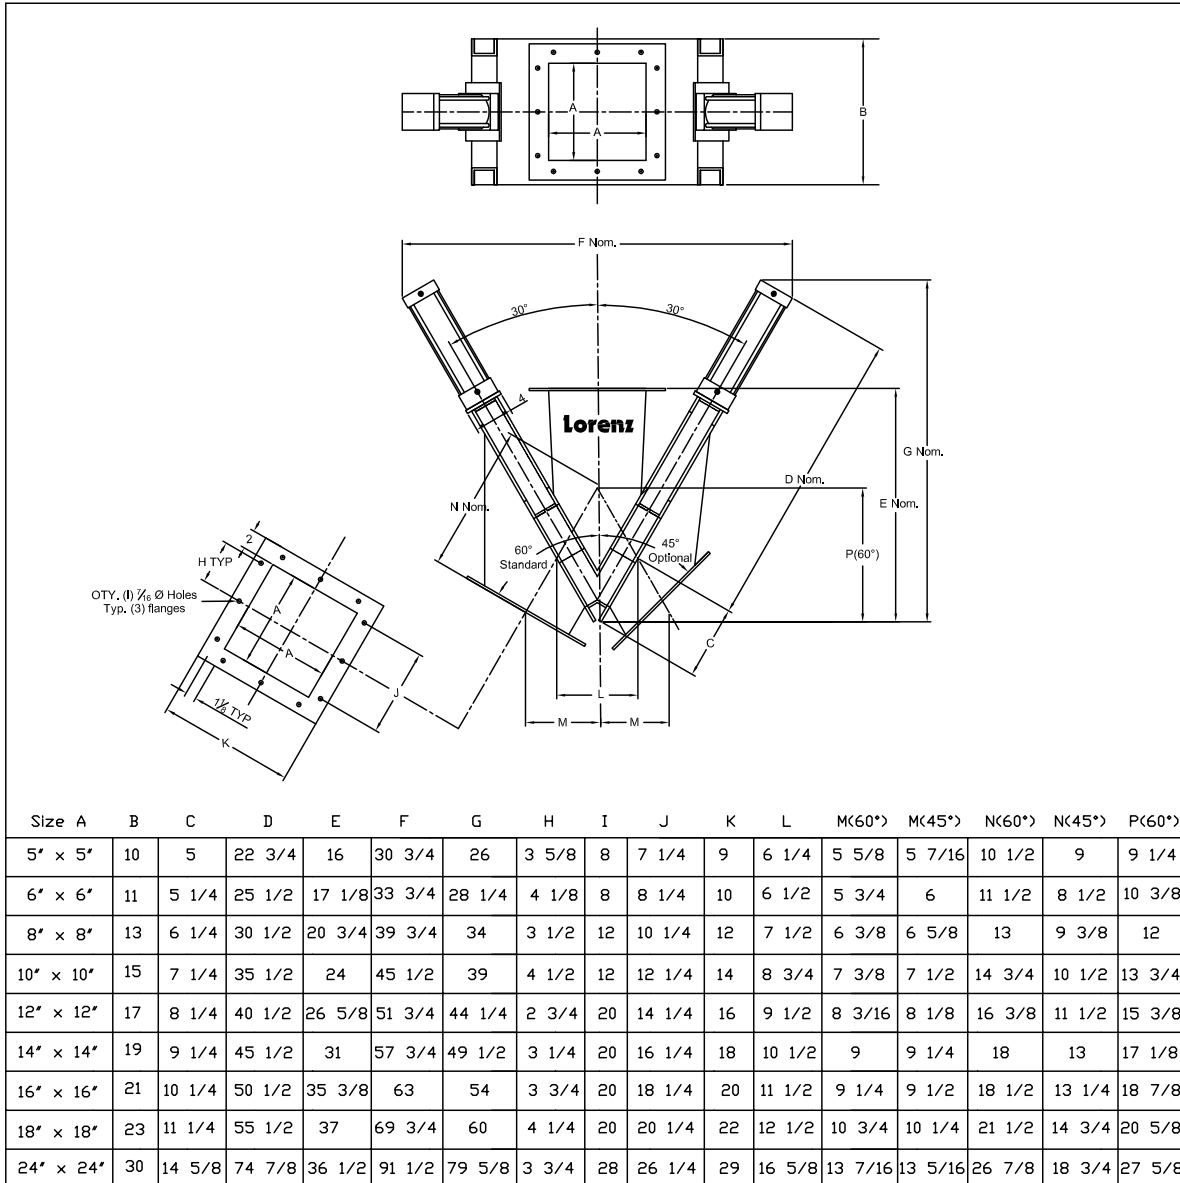

Options

- 316 stainless material contact
- High temperature service
- Hand wheel or crank, electric actuation
- Single and double solenoids
- Variable and infinite positioning controls