


Unsealed Gravity Diverters Series "B"

2 Way & 3 Way

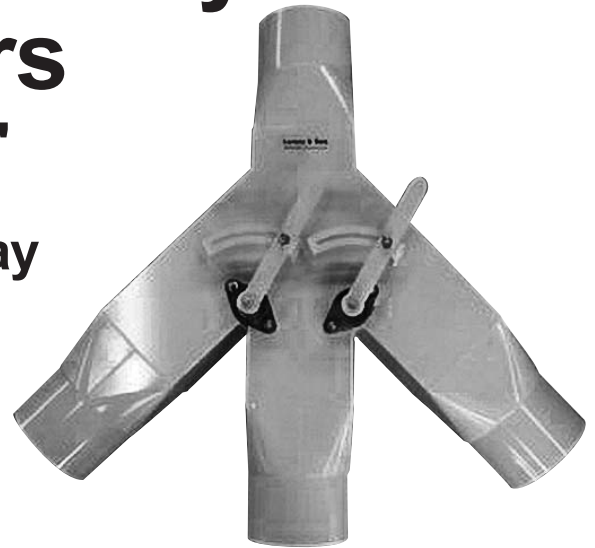


Standard Features

- Stainless Steel, Aluminium & Carbon Steel Construction
- 3" to 14" sizes • Standard with round inlets/outlets
- Manual (hand) actuation or air cylinder controlled
- Configurations - 45° - "ST" • 30° - "Y"
- Options: Solenoids, limit switches, square inlets/outlets


Y Configuration

60°	A	B	C	D
	3	3	16 1/8	11 1/8
	3.5	3	16 7/8	11 7/8
	4	3	17 1/4	12
	4.5	3	18 1/2	13 1/2
	5	3	19 3/8	14 3/8
	6	4	25	18 1/8
	8	4	28 1/8	21 1/2
	10	6	39 1/8	28 5/8
	12	8	49 3/4	36 1/8
	14	8	50 3/4	37

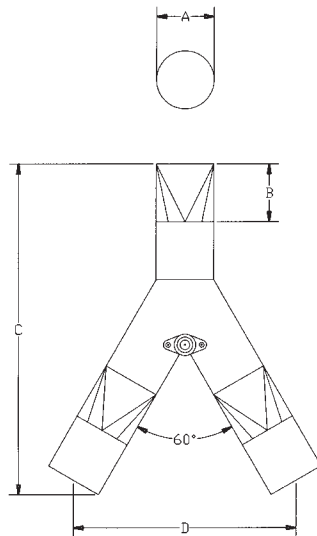

ST Configuration

45°	A	B	C
	3	3	20
	3 1/2	3	21
	4	3	23
	4 1/2	3	24
	5	3	25
	6	4	32
	8	4	37
	10	6	51
	12	8	64
	14	8	69

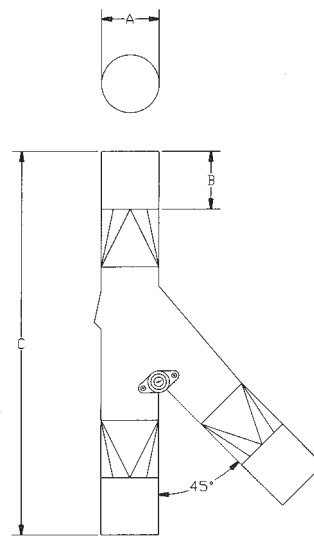

Options: • All dimensions in inches - subject to change! • Standard 14 gauge (.083") body & 11 gauge (.120") blade up to 5".
 • Over 5" 11 gauge (.0125") body & 3/16 gauge (.187") blade.