


# PleatJet II™ Horizontal Dust Collector



Optimized Opti-Pulse™ Cartridge Cleaning System Delivers Optimal Collector Performance

Specially engineered Opti-Pulse™ venturi pulse system maximizes energy release ... provides more uniform dust release. Cleans all of the cartridge, including the hard-to-clean cartridge tops which are not cleaned by conventional pulse systems.

Plus, the PleatJet II is loaded with standard features that you probably would pay extra for with other collectors.

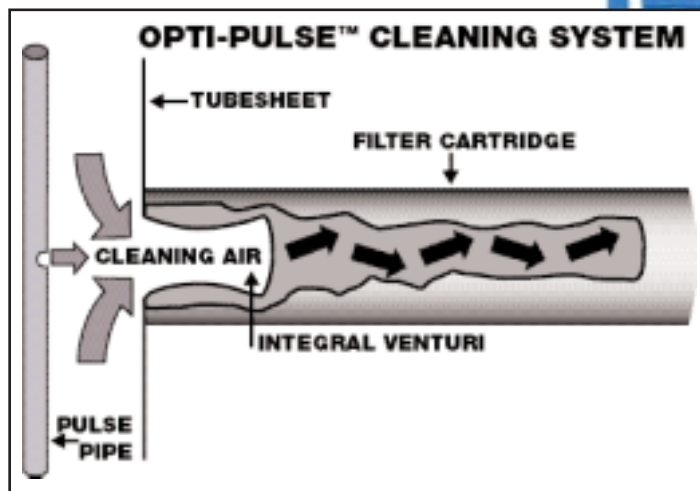

You get this...	...because we do this!
• Optimal cartridge cleaning	√ Opti-Pulse venturi cleaning system √ MP-404™ timer with "Clean-On-Demand" module
• Long service life	√ All welded (one piece) construction √ Heavy duty cartridge support (not cantilevered)
• An exact fit to your needs	√ Modular design offers a multitude of configurations √ Multiple inlet and outlet locations √ Accommodates low head room
• Easy maintenance	√ No-tools quick release doors √ Uses industry standard cartridges √ Cleaning system accessible from grade



# SLY Horizontal Cartridge Filter Specifications

Model <sup>(1)</sup>	Filter Cartridge Media Area <sup>(2)</sup>	Number of Cartridges	Height (Inches) <sup>(3)</sup>	Length (Inches)	Width (Inches)
HCF-2-1-26	452	2	113	45	50
HCF-2-2-26	904	4	133	45	50
HCF-2-3-26	1,356	6	153	45	50
HCF-4-2-26	1,808	8	133	85	50
HCF-2-4-36	2,496	8	173	45	60
HCF-4-3-26	2,712	12	153	85	50
HCF-4-4-26	3,616	16	173	85	50
HCF-6-3-26	4,068	18	153	125	50
HCF-4-4-36	4,992	16	173	85	60
HCF-4-3-52	5,424	24	163	85	76
HCF-10-3-26	6,780	30	153	205	50
HCF-4-4-52	7,232	32	183	85	76
HCF-6-3-52	8,136	36	163	125	76
HCF-10-4-26	9,040	40	173	205	50
HCF-8-4-36	9,984	32	173	165	60
HCF-6-4-52	10,848	48	183	125	76
HCF-12-3-36	11,232	36	153	245	60
HCF-10-4-36	12,480	40	173	205	60
HCF-10-3-52	13,560	60	163	205	76
HCF-8-4-52	14,464	64	183	165	76
HCF-12-4-36	14,976	48	173	245	60
HCF-14-4-36	17,472	56	173	285	60
HCF-10-4-52	18,808	80	183	205	76
HCF-16-4-36	19,968	64	173	325	60
HCF-12-4-52	21,696	96	183	245	76
HCF-14-4-52	25,312	112	183	285	76
HCF-16-4-52	28,928	128	183	325	76

## Notes:

1. All sizes are not listed. 26", 36" and 52" cartridge lengths available in all sizes.
2. Filter area based upon cellulose media.
3. Height includes supports with 48" clearance below hopper.

## Options

- Filter Cartridge Design Options
- Screw Conveyors
- Rotary Valves
- High Inlets
- AR Inlets
- Structural Platforms
- Explosion Proof Electricals
- Magnehelic
- Control Panels
- Exhaust Fans
- Silencers
- After-Filters
- Cold Weather Kit
- Special Paint
- Stainless Steel Construction
- Explosion Vents
- Bag-In/Bag-Out Collar
- Drum Filling Attachment

©2001 SLY, Inc. PJ-200 901 Printed in USA. PleatJet and Opti-Pulse are trademarks of SLY, Inc.

**For genuine SLY  
Replacement filters and Parts, call:  
1-800-200-9520**



P.O. Box 5939, Cleveland, Ohio 44101  
(440) 891-3200 • Fax (440) 891-3210  
8300 Dow Circle, Strongsville, Ohio 44136  
1-800-334-2957 • Web: <http://www.slyinc.com>  
E-mail: [info@slyinc.com](mailto:info@slyinc.com)